



# tuttotondo PLAY

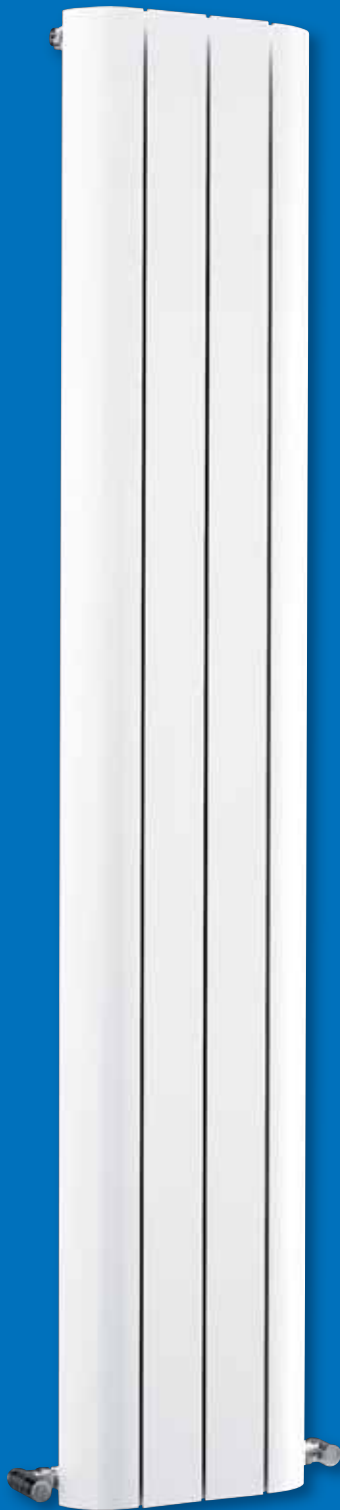

grupporagaini

THE FUTURE WE ARE IN

# tuttotondo PLAY

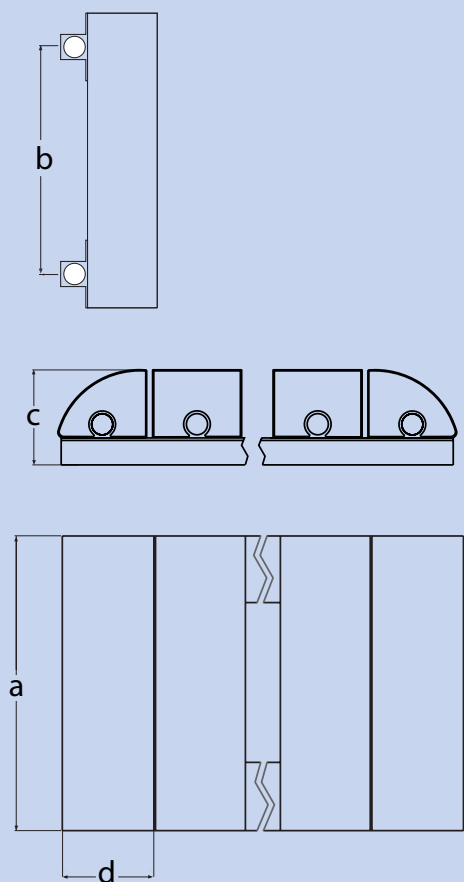


## Tuttotondo PLAY. Aerodynamic design.

Play is the perfect combination of aesthetics and heating power.

The rounded lines bring softness and operating practicality to the element, offering extraordinary heating comfort.



## Connection Codes

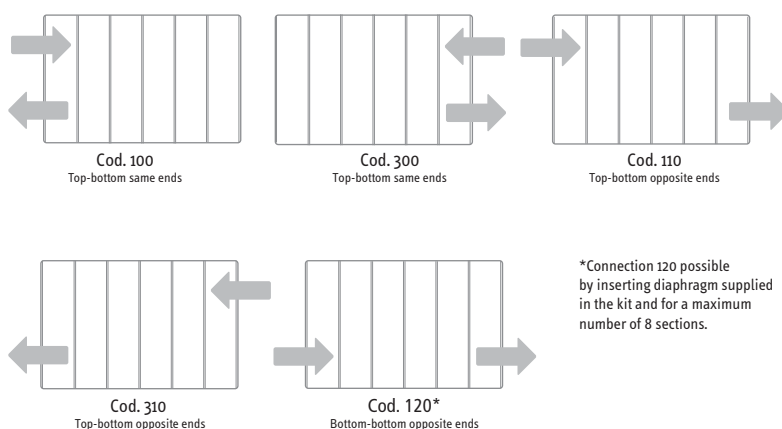

\*Connection 120 possible by inserting diaphragm supplied in the kit and for a maximum number of 8 sections.

MODEL	Height (a) mm	Centres (b) mm	Depth (c) mm	Width (d) mm	Water Capacity litres/elem.	Unloaded Weight kg/elem.	$\Delta t$ (50°C) EN 442 kcal/elem.	$\Delta t$ (50°C) EN 442 W/elem.	Exponent n.	Coefficient Km
Play 500	500	440	85	85	0,20	0,90	82	95		
Play 1000	1000	940	85	85	0,40	1,50	138	161		
Play 1200	1200	1140	85	85	0,45	1,80	159	185		
Play 1500	1500	1440	85	85	0,50	2,30	190	221		
Play 1800*	1800	1740	85	85	0,52	2,66	211	245	1,35580	1,217470
Play 2100*	2100	2040	85	85	0,62	3,12	238	276	1,36147	1,344178

Characteristic Equation:  $\phi = K_m \Delta t^n$ . \*Thermal power values measured at the Milan Polytechnic in accordance with the EN442 norm. In order for the radiator to function correctly, it is recommended that you use an automatic valve with an air vent and that you never isolate the battery from the installation by closing its valves. Also remember that the guarantee is valid as long as the installations working pressure does not exceed 10 bar. Maximum working temperature: 120°. Hub Ø: 1/2". Radiators are guaranteed 10 years on painting.



grupporagaini

THE FUTURE WE ARE IN

Gruppo Ragaini S.p.a.

S.S. 77 Val di Chienti, 14 - 60025 Loreto (An) Italia

Tel. +39 071 7500740 - Fax +39 071 978814

www.grupporagaini.com - info@grupporagaini.com