

- tuttotondo STRA




grupporagaini

THE FUTURE WE ARE IN

tuttotondo STRA

Tuttotondo STRA. Break with the past.

Characterised by rounded shapes outlined with horizontal breaks, the personality of the Tuttotondo Stra is at one with its appearance wherever it is installed, breaking the pattern of the traditional radiator.

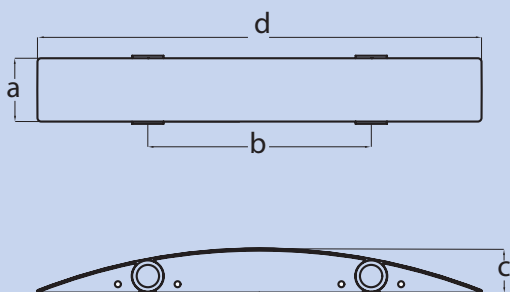

MODEL	Height (a) mm	Centres (b) mm	Depth (c) mm	Width (d) mm	Water Capacity litres/elem.	Unloaded Weight kg/elem.	Δt (50°C) EN 442 kcal/elem.	Δt (50°C) EN 442 W/elem.	Exponent n.	Coefficient Km
STRA VERTICAL	90	300	60	596,5	0,07	1,01	43	50	1,22057	0,4224

Characteristic Equation: $\phi = K_m \Delta t^n$. Thermal power values measured at the Milan Polytechnic in accordance with the EN442 norm. In order for the radiator to function correctly, it is recommended that you use an automatic valve with an air vent and that you never isolate the battery from the installation by closing its valves. Also remember that the guarantee is valid as long as the installations working pressure does not exceed 20 bar. Maximum working temperature: 120°. Hub Ø: 1"

Radiators are guaranteed 10 years on painting.



grupporagaini

THE FUTURE WE ARE IN

Gruppo Ragaini S.p.a.

S.S. 77 Val di Chienti, 14 - 60025 Loreto (An) Italia

Tel. +39 071 7500740 - Fax +39 071 978814

www.grupporagaini.com - info@grupporagaini.com